

ET9

eTrack 9

Project Details

Project

Type

Prepared By

Date




Features & Performance

Experience exceptional versatility without the premium price tag. The eTrack 9 combines a robust, heat-dissipating aluminum build with fully customizable lighting: featuring 5 CCT options and 4 beam angles, ensuring vivid, high-quality illumination for any project. Crafted from high-grade 6063 aluminum and expertly powder-coated for lasting durability, this adaptable track light lets you fine-tune your ambiance, providing true-to-life light exactly where you need it.

Lumen Output:	Up to 3000 Lumens
Wattage:	10-30W
Efficiency:	Up to 100 Lumens/Watt
CRI:	>90
Operating Temperature:	-4°F to 104°F
IP Rating:	IP20 - dry location
Dimming:	TRIAC
Life Expectancy:	>50,000 Hours

Dimensions

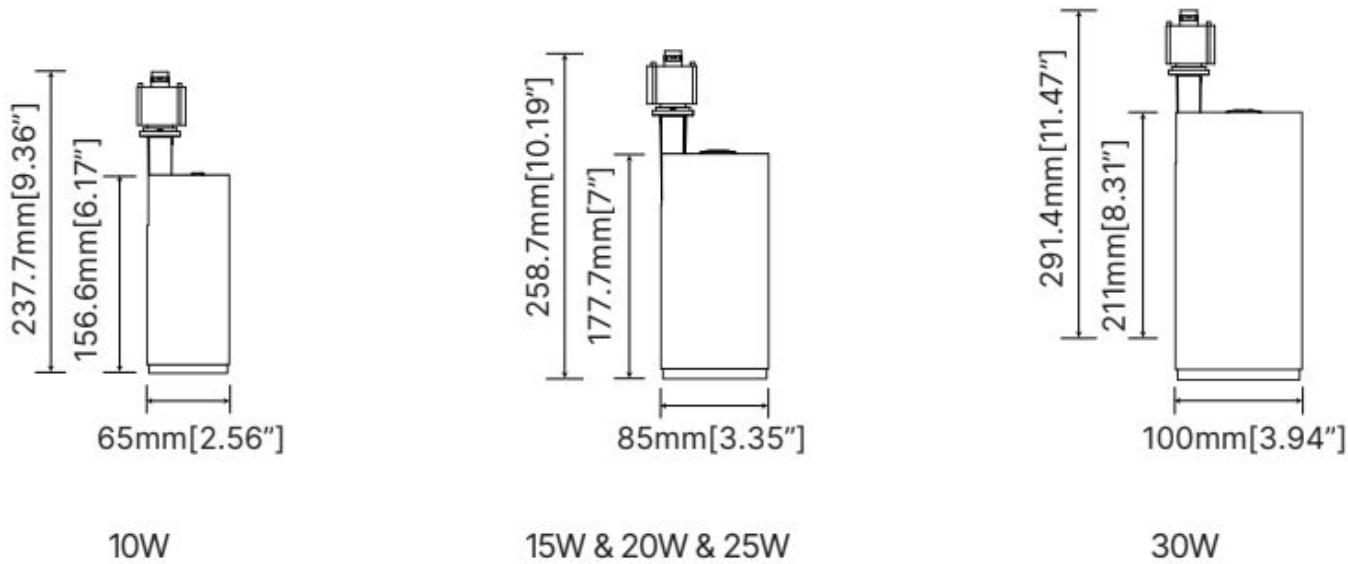

Performance Data

Model #	Wattage Selectable	CCT Selectable	Nominal CCT	LPW	Watts	Lumens	CRI
BLET9-10W	No	Yes	2,700K	100lm/W	10W	1,000lm	>90Ra
			3,000K			1,000lm	
			3,500K			1,000lm	
			4,000K			1,000lm	
			5,000K			1,000lm	
BLET9-15W			15W		2,700K	1,500lm	
					3,000K	1,500lm	
					3,500K	1,500lm	
					4,000K	1,500lm	
					5,000K	1,500lm	
BLET9-20W			20W		2,700K	2,000lm	
					3,000K	2,000lm	
					3,500K	2,000lm	
					4,000K	2,000lm	
					5,000K	2,000lm	
BLET9-25W			25W		2,700K	2,500lm	
					3,000K	2,500lm	
					3,500K	2,500lm	
					4,000K	2,500lm	
					5,000K	2,500lm	
BLET9-30W			30W		2,700K	3,000lm	
					3,000K	3,000lm	
					3,500K	3,000lm	
					4,000K	3,000lm	
					5,000K	3,000lm	

Technical Specifications

Compliance

ETL:

Product has been tested and meets safety and performance standards set by Intertek's Electrical Testing Labs.

Track System

HALO Track Compatible:

Compatible with HALO (H-Type) Track Systems, 120VAC 60Hz

CCT

Field Adjustable Color Temperature:
2700K/3000K/3500K/4000K/5000K

Construction

Materials:

6061 Aluminum die-cast housing
PMMR lens assembly

Finish:

Standard color is black.

Ambient Temperature:

-4°F(-20°C) to 104°F(40°C)

Optics

Beam Angle:

24°; 30°; 36°; 60°

Color Rendering Index:

>90Ra

Electrical

Dimming:

TRIAC dimming

Input Voltage:

AC120V, 50/60 Hz

Warranty

5-year limited warranty. Complete warranty terms are located at www.bluecoltlighting.com/warranty

Order Guide

PRODUCT TYPE	WATTS	CCT	DIAMETER	COLOR	BEAM ANGLE	OPTIONS
BLET9 = Bluecolt Lighting eTrack 9	10W	5CCT= (2,700K; 3,000K; 3,500K; 4,000K; 5,000K Selectable)	2.5i = 2.56" (10W)	B = Black W = White	24D = 24°	
	15W		3i = 3.35" (15-25W)		30D = 30°	
	20W		4i = 3.94" (30W)		36D = 36°	
	25W				60D = 60°	
	30W					
NOTES						
Contact clients@bluecoltlighting.com for questions or additional customization options.						
SAMPLE ITEM#	BLET9-20W-5CCT-3i-B-36D					