


SL3

Linear Strip Light 3

Project Details

Project	Type
Prepared By	Date

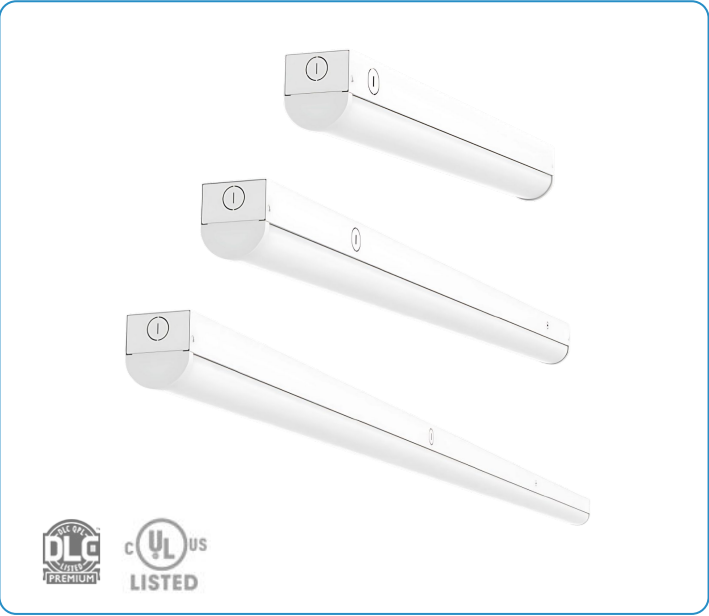

Features & Performance

The SL3 is a high-performance, utility-focused strip light designed for effortless installation and broad compatibility. With multiple lengths (2ft, 4ft, 8ft), adjustable wattage, and color temperatures to fit any space: workshops, storage areas, retail, or industrial settings. Installation is a breeze with tool-free wiring and spring clips, while DLC compliance and optional sensors or emergency backup ensure energy efficiency and reliability.

More Highlights:


- High efficacy: up to 150 Lumens/Watt.
- Tool-free wiring access.
- Multiple sizes & wattages.

Lumen Output:	Up to 11,378 Lumens
Wattage:	15-80W
Efficacy:	Up to 150 Lumens/Watt
CRI:	>80
Operating Temperature:	-13° to 122°F
Compliance:	cULus listed for Damp locations
Dimming:	0-10V Dimmable
Life Expectancy:	>50,000 Hours

SL3

Linear Strip Light 3

Dimensions

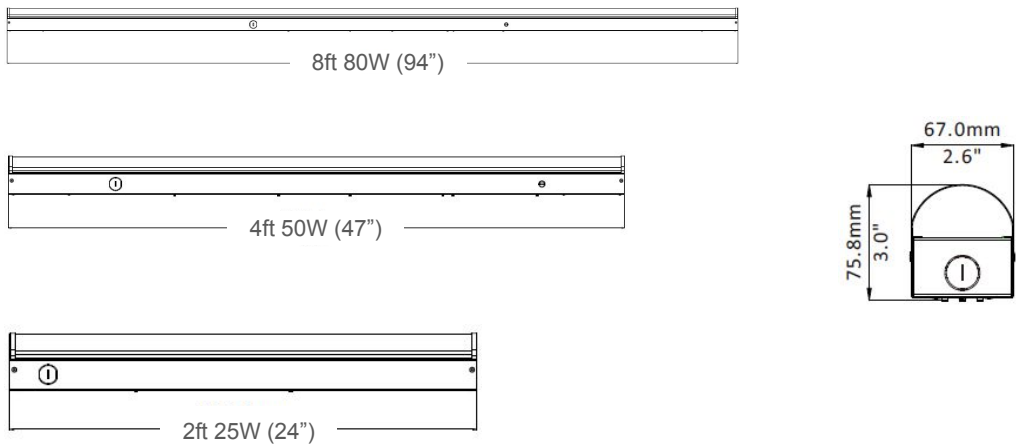

Performance Data

Model	Lumen Level	Wattage Selectable	Nominal CCT	CCT Selectable	Lumens	Watts	LPW	CRI
BLSL3-25W	1	Yes	3500	Yes	2,123	15	142	>80CRI
			4000		2,289	15	153	
			5000		2,180	15	146	
	2		3500		2,750	20	138	
			4000		2,965	20	149	
			5000		2,824	20	142	
	3		3500		3,283	25	132	
			4000		3,539	25	142	
			5000		3,371	25	135	
BLSL3-50W	1		3500		4,187	30	140	
			4000		4,486	30	150	
			5000		4,243	30	142	
	2		3500		5,268	40	132	
			4000		5,645	40	141	
			5000		5,339	40	134	
	3		3500		6,284	50	126	
			4000		6,734	50	135	
			5000		6,368	50	128	
BLSL3-80W	1		3500		8,358	60	140	
			4000		8,961	60	150	
			5000		8,498	60	142	
	2		3500		9,358	70	134	
			4000		10,033	70	144	
			5000		9,514	70	136	
	3		3500		10,613	80	133	
			4000		11,378	80	143	
			5000		10,790	80	135	

SL3

Linear Strip Light 3

Technical Specifications

Field Adjustability

Field Adjustable Light Output:

25W/20W/15W
50W/40W/30W
80W/70W/60W

Field Adjustable Color Temperature:

3500K/4000K/5000K

Compliance

UL Listed:

cULus listed for damp locations.

DLC®:

DLC (DesignLights Consortium) Qualified.
Please refer to the DLC website for specific
product qualifications at www.designlights.org

Construction

Materials:

Molded cold rolled sheet metal housing.

Finish:

Standard color is white.

Ambient Temperature:

-40°F (-40°C) to 113°F (45°C)

Electrical

Dimming Driver:

0-10v dimmable driver which can dim from
100% down to Off.

Input Voltage:

120-277VAC, 50/60Hz

Optics

Selectable CCT: 3500K/4000K/5000K (default
setting)

Lens: White diffuser with wide beam spread.


CRI: >80Ra Standard

Warranty

5-year limited warranty. Complete warranty
terms are located at

www.bluecoltlighting.com/warranty

Power & CCT Selection

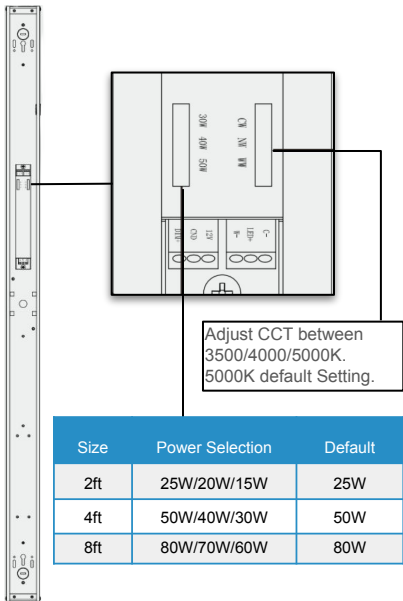

Order Guide

PRODUCT TYPE	WATTS	CCT	OPTIONS
BLSL3 = Bluecolt Lighting Linear Strip Light 3	25W2F = (25W/20W/15W Selectable 2') 50W4F = (50W/40W/30W Selectable 4') 80W8F = (80W/70W/60W Selectable 8')	3CCT= 3500K/ 4000K/ 5000K Selectable	PM = Pendant Mount SM = Surface Mount MS = Motion Sensor EM = Emergency Battery Backup
NOTES			
Contact clients@bluecoltlighting.com for questions or addition customization options.			
SAMPLE ITEM#	BLSL3-50W4F-3CCT-SM-EM		