


V6

Vapor-sealed LED Fixture

BLUECOLT[®]
LIGHTING
...beautiful light for all




DIMENSIONS

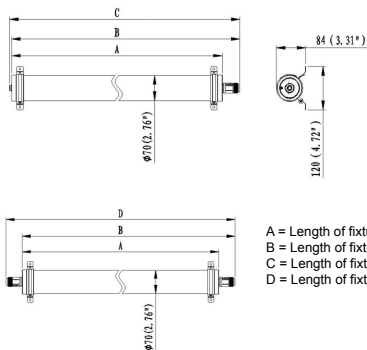

A = Length of fixture body
B = Length of fixture with one connector
C = Length of fixture with vent
D = Length of fixture with double connector

MODEL	DIAMETER	Length	WEIGHT
20W (2')	2.76" Ø	A = 23.63" B = 25.59" C = 25.83" D = 27.56"	2.87 lbs
40W (4')	2.76" Ø	A = 44.41" B = 46.38" C = 46.61" D = 48.38"	4.01 lbs
50W (4.5')	2.76" Ø	A = 54.72" B = 56.69" C = 56.93" D = 58.66"	4.76 lbs

Beam Angle



FEATURES

Bluecolt's V6 vapor-proof LED is designed for maximum reliability in automotive plants and industrial facilities.

- Durability ratings up to IP69K and IK10.
- Linkable and 1-10v dimmable.
- Suspended or surface mounting options.

PERFORMANCE

Lumen Output:	Up to 8,000 Lumens
Wattage:	20-50W
Efficiency:	Up to 160 Lumens/Watt
CRI:	>80
Voltage:	100-277V AC
Operating Temperature:	-22° to 104°F
Lifespan:	50,000 hours
IP Rating:	IP66/IP69K
Dimming:	1-10V Dimmable

PRODUCT TYPE	WATTS	CCT	LENGTH	OPTIONS
BLV6 = Bluecolt Lighting V6 Utility Linear	20W 40W 50W	4K = 4000K 5K = 5000K	2F = 2' 4F = 4' 4.5F = 4.5'	IP69 = IP69K SM = Suspension Mounting RV = Rebreather Valve
Sample Item Number: BLV6-40W-5K-4F				